

INSTALLATIONS ON STANDARDIZED STRAIGHT AND CURVED PROFILES, WITH IPN, IPE, HEB, HEA OR HEM SHAPES. (Series 50, 80, 110, etc.)

They roll directly on standardized profiles (IPN, IPE, HEB, HEA or HEM) The possible combinations of track profiles with wheel, as well as the number and type of cable-supporting saddles, allow obtaining several different references.

TROLLEYS AND CLAMPS ALSO AVAILABLE IN STAINLESS STEEL.


TROLLEY WHEELS



REF. WHEEL	CODE	WHEEL DIAMETER (mm.)	MAXIMUM SPEED (m/min.)
RG-RC-50	50	50	80
RG-RC-80	80	80	120
RG-RC-110	110	110	230

Manufactured from tempered steel, with steel ball bearings and lifelong lubrication.

SADDLES FOR POLYAMIDE CABLES

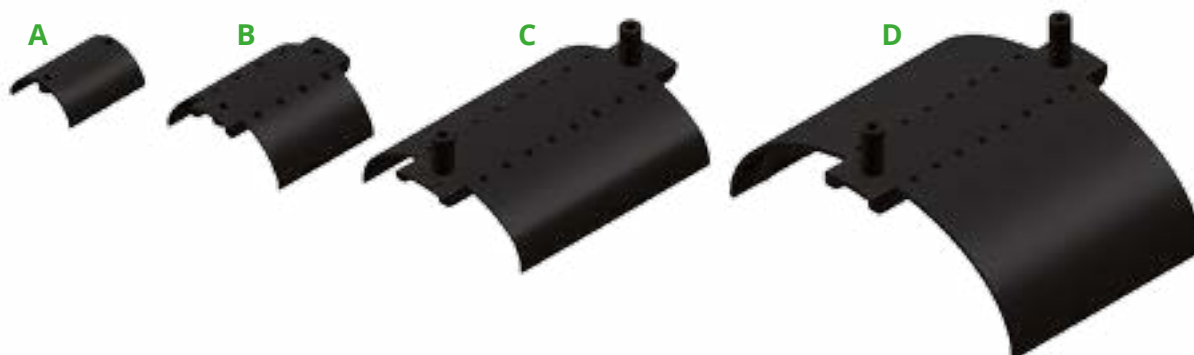

References of saddles, maximum capacity of cable bundle and admissible load in Kg. by saddle (dynamic load) according to type.

Material:

- Polyamide 6.6 (Saddle ref. A)
- Polyamide 6.6 + fibreglass. (Saddles ref. B, C and D)

REF. SADDLE	CODE	MAX. BUNDLE (mm.)	MAXIMUM LOAD (kg.)
RG-BA-90	A	56 x 15	40
RG-BB-130	B	92 x 30	100
RG-BC-250	C	182 x 30	150
RG-BD-250	D	182 x 40	200

METALLIC CABLE SUPPORT SADDLES



References of saddles, maximum capacity of cable bundle and admissible load in Kg. by saddle (dynamic load) according to type.

REF. SADDLE		CODE	MAX. BUNDLE L x H (mm.)	MAX. LOAD (kg.)
ZINC PLATED STEEL	STAINLESS STEEL			
RG-BACH-90	RG-BACH-90-INOX	ACH	56 x 15	40
RG-BBCH-120	RG-BBCH-120-INOX	BCH	92 x 30	100
RG-BF-190 *	RG-BF-190-INOX	F	150 x 30	150

* - Saddle RG-BF-190 in hot dip galvanized steel

CODES - HOW TO OBTAIN THE REFERENCES

The trolleys for these applications are referenced as follows: RG + code of the wheel (2 or 3 numbers) + dimension of the profile (2 numbers) + Code of the saddle(s) (from 1 to n numbers) + type of trolley (4, 5 or 6) + STAINLESS STEEL (in the case of being a trolley made from stainless steel, including the saddle).

ØWHEEL	PROFILE	SADDLES	TYPE OF TROLLEY	MATERIAL
RG - XXX	XX	XXXXXX	4 c. end clamp, 5 c. cable trolley, 6 c. towing trolley	STAINLESS STEEL

EXAMPLES:

Ref. RG5008A-5: Cable trolley with wheel diameter 50, for IPN 80 with saddle. A made from polyamide

Ref. RG8012BC-5: Cable trolley with wheels diameter 80, for IPN 120 with one saddle B and another C both made from polyamide.

Ref. RG5008BCH-6-INOX: Towing trolley with wheels diameter 50, for IPN 80 with B saddle made from stainless steel.